



WORKS NOTIFICATION

ENHANCING THE ROAD NETWORK – COVENTRY STREET 28 JUNE – 17 JULY 2017

Ahead of major construction for the Metro Tunnel Project, changes to the road, tram and bicycle networks are required to keep Melbourne moving during construction.

Changes to Coventry Street

In preparation for the changed traffic conditions on St Kilda Road during the construction of the new underground Domain Station, Managing Contractor John Holland is making modifications to the existing traffic island on Coventry Street, creating a new traffic island and combining two turning lanes into one single left turn lane from Coventry Street into Sturt Street. This work is part of many small changes to Kings Way to increase traffic flow.

What we are doing

Service establishment

- Between 28 June and 29 June, a site shed and small laydown area will be set up adjacent to 99-101 Coventry Street. This area needs to be set up prior to construction activity commencing and will be in place for the duration of the works
- This work will require the temporary removal and occupation of four car parking spaces and the relocation of an accessibility car park adjacent to 99-101 Coventry Street.

Modifications to existing traffic island

- Installing three new drainage pits in the road, which involves saw-cutting and excavating the road, installing pits, backfilling the area with an excavator, laying asphalt and reinstating the road
- Modifying the existing traffic island
- Re-sheeting existing asphalt within the intersection, including profile pavement and laying of asphalt pavement
- Installing bluestone kerb and channel.


What to be aware of

- This will combine the two turning lanes into one single left turn lane from Coventry Street into Sturt Street
- These works will require the use of excavators, non-destructive digging trucks, a concrete truck, a saw-cutter, jackhammers and delivery trucks
- Impacts from noise, dust and vibration will be managed in accordance with the Metro Tunnel Project's Environmental Performance Requirements (EPRs)
- Works will be carried out during the day to minimise disruption to the local community, however there will be medium level noise associated with saw-cutting and excavation of the trench on Coventry Street
- The work areas will be reinstated at the conclusion of works.



Construction partners:



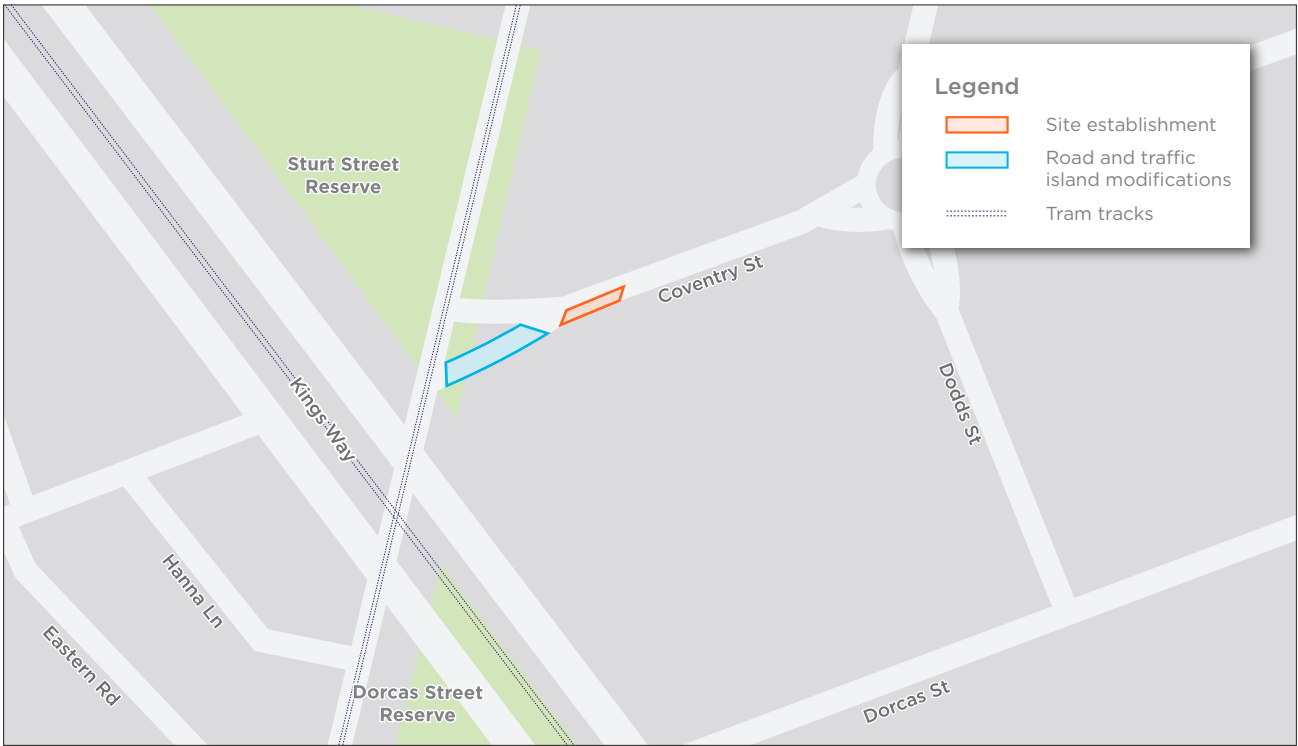

Indicative only

When

- 7am - 6pm, Monday to Friday
- 7am - 1pm, Saturdays.

More information

To find out more about the Metro Tunnel Project and register for future email updates:

- metrotunnel.vic.gov.au
- 1800 551 927 (24 hours a day, 7 days a week)
- @metrotunnelvic
- Melbourne Metro Rail Authority
- facebook.com/metrotunnel
- metrotunnelvic
- Melbourne Metro Rail Authority, PO Box 4509, Melbourne, VIC 3001
- Subscribe to eNews: metrotunnel.vic.gov.au/contact-us

Interpreter Service
(03) 9280 0700

Arabic	العربية	Russian	Русский
Cantonese	廣東話	Serbian	Српски
Greek	Ελληνικά	Sinhalese	සිංහල
Italian	Italiano	Spanish	Español
Korean	한국어	Turkish	Türkçe
Macedonian	Македонски	Vietnamese	Tiếng Việt
Mandarin	普通话		



Construction partners:



Authorised and published by the Victorian Government, 1 Treasury Place, Melbourne.